

# LA REVUE DE PHYSIQUE APPLIQUÉE

Publiée sous la responsabilité de la Commission des Publications Françaises de Physique

Président : F. LALOË (E.N.S., Paris)

Editeur Scientifique : G. FOURNIER (O.N.E.R.A.)

Co-Editeurs Scientifiques :

C. CAMY-PEYRET (Paris)  
J. CASTAING (Meudon)  
G. CHARPAK (Genève, Suisse)  
J. CHAUVIN (Paris)  
C. DEUTSCH (Orsay)  
A. FAYT (Louvain, Suisse)

A. FROVA (Rome, Italie)  
M. ILEGEMS (Lausanne, Suisse)  
J. JERPHAGNON  
(Conflans-Ste-Honorine)  
L. P. KUBIN (Poitiers)  
H. MUGHRABI (Erlangen, R.F.A.)

V. M. ORERA (Saragosse, Espagne)  
V. SAFAROV (Léningrad, U.R.S.S.)  
M. SOUTIF (Grenoble)  
J. TAINE (Châtenay-Malabry)  
P. VEYSSIÈRE (Poitiers)  
C. WEISBUCH (Orsay)  
W. ZAWADSKI (Varsovie, Pologne)

Rédacteur en chef : Jeanne BERGER

La *Revue de Physique Appliquée* paraît à raison de douze numéros par an. Les domaines couverts sont : sciences des matériaux, physique des dispositifs électroniques, physique des fluides et mécanique, physique des transferts d'énergie, physique des particules dans le vide et les plasmas, optique et lasers et instrumentation.

Les manuscrits proposés doivent être inédits, et rendre compte, soit de mesures originales relatives à des phénomènes ou des matériaux connus, soit de méthodes expérimentales ou d'appareillages nouveaux.

La *Revue* publie également des *notes brèves* présentant des résultats ou des dispositifs expérimentaux originaux en deux pages de revue maximum, y compris résumés français, anglais et figures, ainsi que des *mises au point* en physique appliquée ou instrumentale.

LANGUES. — Français, anglais, allemand ou russe.

DOCUMENTS A FOURNIR :

— Texte en trois exemplaires, dactylographiés en double interligne au recto seulement, avec marges de 4 cm au moins.

— Résumé dans la langue originale, en un seul paragraphe.

— Traductions du titre et du résumé en anglais et en français.

— Titre abrégé de 50 signes au plus, pour têtes de pages.

— Légendes des figures et références numérotées sur pages séparées.

— Pour les articles en français, les légendes doivent être à la fois en français et en anglais.

— Figures originales sur calque, numérotées au crayon ; joindre une copie à chaque exemplaire du texte.

— Numéros de code dans *Physics Abstracts*.

On se conformera, pour la présentation du texte, des résumés, des formules, figures, tableaux et références, aux règles du Manuel de Rédaction de la Société Européenne de Physique. (*J. Physique* 34 (1973) I-VIII.)

Ne rien souligner à l'encre ou au crayon rouge. Les indications nécessaires (position des figures, définition des symboles ou caractères spéciaux la première fois où ils sont employés) seront données en marge au crayon.

TIRÉS A PART. — Les auteurs en reçoivent gratuitement 50. Des tirés à part supplémentaires peuvent être envoyés sur demande.

Les manuscrits doivent être soumis à :

The *Revue de Physique Appliquée* publishes twelve issues a year. The topics covered are : science of materials, physics of electronic devices, physics of fluids and mechanics, physics of energy transfers, physics of particles in vacuum and plasmas, lasers and optics and instrumentation.

Manuscripts submitted should describe either original measurements relating to known phenomena or materials, or novel experimental methods or apparatus, which have not been published elsewhere.

The *Revue* publishes also *short notes* on results or original experimental devices, which, together with abstracts in French and English and figures, occupy no more than two pages. *Overview articles* on applied or instrumental physics are also accepted.

LANGUAGE. — French, English, German or Russian.

MATERIAL TO BE SUBMITTED :

— Three copies of text, typewritten double-space on one side only, with margins of at least 4 cm.

— Title and one-paragraph abstract in the original language, plus translations in English (if the original language is not English) and if possible in French (if not, they will be translated by the *Revue*).

— Shortened title of less than 50 letters for use as page head.

— Figure captions and numbered references on separate sheets.

— For articles in French, figure and table captions must be submitted in both French and English.

— Original figures on tracing paper numbered with pencil ; join a copy of the figures to each copy of the manuscript.

— Code number according to *Physics Abstracts*.

The presentation of the text, abstracts, displayed formulae, figures, tables and references should follow the recommendations of the Style Manual of the European Physical Society. (*J. Physique* 34 (1973) I-VIII.)

Avoid the use of ink or red pencil. The proper indications (figure positions, definition of symbols or special characters when used for the first time) should be indicated on the margin with a pencil.

REPRINTS. — The authors receive 50 reprints free of charge. Additional reprints may be sent upon request.

Manuscripts should be submitted to :

## REVUE DE PHYSIQUE APPLIQUÉE

Secrétaire : Denise LELIÈVRE

Bâtiment 510, Université Paris-Sud - 91405 ORSAY (France)

Après acceptation de leur article, les auteurs adresseront leur correspondance à :

After the manuscript has been accepted, any further correspondence should be addressed to :

## LES EDITIONS DE PHYSIQUE

Z. I. de Courtabœuf - B. P. 112 - Avenue du Hoggar, 91944 LES ULIS CEDEX (France)

Tél. : (1) 69 07 36 88 — Téléc. : 692321 F

## ABONNEMENTS — SUBSCRIPTIONS 1987

	France	Etranger
	Courrier ordinaire	Surface mail
B <b>Journal de Physique</b> (tome 48) — Publication mensuelle (12 numéros par an) <i>Published Monthly</i> (12 issues per year) .....	F.F. 1 930	F.F. 2 330
C <b>Revue de Physique Appliquée</b> (vol. 22) — Publication mensuelle (12 numéros par an) certains numéros regroupent un sujet précis <i>Published Monthly</i> (12 issues per year) some deal with definite topics .....	F.F. 1 330	F.F. 1 610
D <b>Europhysics Letters</b> (vol. 3 et 4) — Publication bi-mensuelle (24 numéros par an) <i>Published bi-monthly</i> (24 issues per year) .....	F.F. 2 400	S.F. 595
E <b>Colloques - Conference Proceedings</b> — La parution d'un Colloque dépend de la date à laquelle il s'est tenu (temps de publication : environ 6 mois) <i>The publication of Conference Proceedings depends on the date when these Conferences have been held (it requires about 6 months to publish a Colloquium)</i> .....	F.F. 3 190	F.F. 3 840
F <b>Annales de Physique</b> (vol. 12) — 6 parutions annuelles — 6 issues per year <i>Published bi-monthly</i> (24 issues per year) .....	F.F. 1 030	F.F. 1 570
A I <b>ABONNEMENT GROUPE</b> Journal de Physique + Revue de Physique Appliquée + Europhysics <b>COMBINED SUBSCRIPTION</b> Letters + Colloques + Annales de Physique (B + C + D + E + F) .....	F.F. 8 380	F.F. 9 930
A II <b>ABONNEMENT GROUPE</b> Journal de Physique + Revue de Physique Appliquée + Europhysics <b>COMBINED SUBSCRIPTION</b> Letters + Colloques (B + C + D + E) .....	F.F. 7 680	F.F. 9 055
A III <b>ABONNEMENT GROUPE</b> Journal de Physique + Revue de Physique Appliquée + Colloques + <b>COMBINED SUBSCRIPTION</b> Annales de Physique (B + C + E + F) .....	F.F. 6 200	F.F. 7 750

Prix de ce numéro : France F 300 — Etranger F 350

Bayerische  
Staatsbibliothek

## SOMMAIRE

## Lasers Femtosecondes et Phénomènes Ultrarapides

*Impulsions ultracourtes*

- Diagnostiques ultrarapides. (*Texte en anglais*). .....J.-C. DIELS, J.J. FONTAINE et W. RUDOLPH 1605
- Autocorrélation interférométrique monocoup d'impulsions femtosecondes.  
.....F. SALLIN, P. GEORGES, G. LE SAUX, G. ROGER et A. BRUN 1613
- Synthèse de forme d'impulsions de Fourier picosecondes et femtosecondes. (*Texte en anglais*).  
.....A.M. WEINER et J.P. HERITAGE 1619
- Étude d'un laser à colorant à impulsions ultra-brèves régulées pour la spectroscopie non linéaire femtoseconde.  
(*Texte en anglais*). .....Y. ISHIDA et T. YAJIMA 1629
- Évolution d'impulsions lumineuses en couic (« chirped ») et régime stationnaire dans les lasers à colorant  
femtosecondes à blocage en phase des modes passifs. (*Texte en anglais*).  
.....V. PETROV, W. RUDOLPH et B. WILHELMI 1639
- Lasers à colorant continu à blocage de mode passif fonctionnant de 490 nm à 800 nm. (*Texte en anglais*).  
.....P.M.W. FRENCH, J.A.R. WILLIAMS et J.R. TAYLOR 1651
- En route vers le Petawatt. ....P. MAINE, D. STRICKLAND, P. BADO, M. PESSOT et G. MOUROU 1657
- Amplificateur optique multipassage utilisant une géométrie de résonateur confocal double. (*Texte en anglais*).  
.....R.L. FORK, F.A. BEISSER et D.K. FORK 1665
- Sur un préamplificateur laser femtoseconde de conception optique simple. ....C. HIRLMANN 1673
- Effets des automodulations, modulation induite et modulation croisée de phase sur la génération d'impulsions  
picosecondes et femtosecondes de lumière blanche à très large bande spectrale. (*Texte en anglais*).  
.....P.L. BALDECK, P.P. HO et R.R. ALFANO 1677

*Phénomènes ultrarapides*

- Étude par laser femtoseconde des processus ultra-rapides dans les semi-conducteurs et les grosses molécules.  
(*Texte en anglais*). .....C.L. TANG, F.W. WISE et I.A. WALMSLEY 1695
- Non linéarités excitoniques subpicosecondes dans les puits quantiques. (*Texte en anglais*).  
.....M. JOFFRE, D. HULIN, A. MIGUS, A. MYSYROWICZ et A. ANTONETTI 1705
- Effets femtosecondes et cohérents dans le CdSe solide et les verres dopés au Cd  $Se_xS_{1-x}$ . (*Texte en anglais*).  
.....N. PEYGHAMBARIAN et S.W. KOCH 1711
- Dynamique intramoléculaire et intermoléculaire dans les liquides moléculaires par diffusion stimulée impulsio-  
nnelle résolue aux temps femtosecondes. (*Texte en anglais*).  
.....S. RUHMAN, A.G. JOLY, B. KOHLER, L.R. WILLIAMS et K.A. NELSON 1717
- Battements Terahertz de modes vibrationnels étudiés par spectroscopie Raman cohérent femtoseconde. (*Texte en*  
*anglais*). .....R. LEONHARDT, W. HOLZAPFEL, W. ZINTH et W. KAISER 1735
- Oscillations ultrarapides de l'absorption et de la biréfringence photoinduites observées par une technique de  
modulation temporelle. ....J. CHESNOY et A. MOKHTARI 1743
- Dynamique moléculaire du benzène après excitation par des impulsions laser femtosecondes. (*Texte en*  
*anglais*). .....J. ETCHEPARE, G. GRILLON, G. HAMONIAUX, A. ANTONETTI et A. ORSZAG 1749
- Réactivité femtoseconde d'un électron en solution aqueuse. (*Texte en anglais*).  
.....Y. GAUDUEL, A. MIGUS, J.P. CHAMBARET et A. ANTONETTI 1755
- Étude des photo-processus rapides dans les molécules biologiques au moyen d'un spectrophotomètre laser  
femtoseconde. (*Texte en anglais*). .....S.V. CHEKALIN, Yu.A. MATVEETS et A.P. YARTSEV 1761
- Processus de relaxation femtosecondes dans des milieux non linéaires étudiés avec une lumière incohérente.  
(*Texte en anglais*). .....T. KOBAYASHI, T. HATTORI, A. TERASAKI et K. KUROKAWA 1773
- Études théoriques de la relaxation vibrationnelle de l'iode dans le xénon liquide à faible densité. (*Texte en*  
*anglais*). .....J.K. BROWN, D.J. RUSSELL, D.E. SMITH et C.B. HARRIS 1787
- Sections efficaces limitées pour couplage multiphotonique. (*Texte en anglais*).  
.....K. BOYER, H. JARA, T.S. LUK, I.A. McINTYRE, A. McPHERSON, R. ROSMAN et C.K. RHODES 1793

## Articles réguliers

*Science des matériaux*

- Préparation d'alliages amorphes silicium-étain hydrogéné. (*Texte en anglais*).  
.....M. VERGNAT, G. MARCHAL et M. PIECUCH 1803

*Physique des dispositifs électroniques*

- Modélisation de la barrière de Schottky en présence d'états d'interface distribués spatialement.  
.....G.N. LU, T. NEFFATI et C. BARRET 1809

*Physique des particules dans le vide et les plasmas*

- Caractéristiques énergétiques de cathodes à micropointes à émission de champ.  
.....A. BRENAC, R. BAPTIST, G. CHAUVET et R. MEYER 1819

*Optique et lasers*

- Une nouvelle technique de stabilisation en fréquence d'un laser sur une cavité de Fabry-Perot.  
.....G. CAMY, R. AMER et N. COURTIER 1835

## Index Auteurs du Tome 22, 1987 ..... 1841

Classification  
Physics Abstracts  
42.65 — 32.50

## Terahertz beats of vibrational modes studied by femtosecond coherent Raman spectroscopy

R. Leonhardt, W. Holzappel, W. Zinth and W. Kaiser

Physik Department E11 der Technischen Universität München, München, F.R.G.

(Reçu le 9 juin 1987, accepté le 18 septembre 1987)

**Résumé.** — Une technique par Raman cohérent femtoseconde récemment développée permet de mesurer des spectres Raman cohérent à transformée de Fourier avec des différences haute-fréquence. L'excitation simultanée de différents modes de vibration avec une force motrice accordable à large bande conduit à un battement de la diffusion Raman cohérent de la sonde. La haute résolution temporelle du montage expérimental permet de mesurer des battements de fréquence de plus de 10 THz avec une précision élevée.

**Abstract.** — A recently developed femtosecond coherent Raman technique allows the measurement of Fourier transform coherent Raman spectra with high-frequency differences. The simultaneous excitation of different vibrational modes with a broad-band tunable driving force leads to a strong beating of the coherent Raman probe scattering. The high time resolution of the experimental set-up allows one to measure beat frequencies of more than 10 THz with high precision.

### 1. Introduction.

During the past decade, time-resolved coherent Raman methods have attracted considerable interest for the study of fast dynamic processes. In particular, time-resolved coherent Raman scattering made it possible to measure — in the time domain — rapid dephasing processes of molecular vibrations in liquids and elucidated various line broadening mechanisms [1-5]. It is the aim of this paper to focus attention on a more recent application. Although time-resolved Raman scattering collects data in the time domain, it allows valuable information to be obtained in the frequency domain. There are various approaches to relate the time and the frequency domain [6-11]: (i) Time resolved coherent Raman scattering, where the spectrum of the coherently scattered light is recorded, has been extensively studied using picosecond light pulses. It is possible to remove the homogeneous contribution to the transition line-width. One finds spectra with narrower lines and one obtains transition frequencies with high accuracy. This technique has been applied to the study of congested spectral regions, where the spontaneous Raman spectrum is smooth, but where the line-narrowing technique revealed structure due to distinct transitions [9-11]. (ii) In the second method the time evolution of the coherent Raman probe signal is recorded with high time resolution.

The Fourier transformation of the experimental data gives a difference frequency spectrum. The frequency resolution of this technique can be improved by using numerical filtering procedures prior to the Fourier transformation. (iii) A third way to analyse the data is a comparison of the data taken in a high time resolution experiment with time dependent functions. High accuracy can be obtained for the determination of difference frequencies.

In this letter we present new experimental data of time-resolved coherent Raman spectroscopy taken with a novel femtosecond Raman spectrometer [12, 13]. The results of these time-domain experiments are subsequently numerically analysed. In this way we obtain frequency differences with high precision. The high time resolution of the femtosecond coherent Raman set-up allows one to measure very high difference frequencies. After a short theoretical description of the basic ideas of the technique we give experimental results. We show that terahertz quantum beats up to 10 THz can be measured giving precise values for the frequency differences of vibrational transitions separated by up to  $350\text{ cm}^{-1}$ .

### 2. Theory.

Time-resolved coherent Raman scattering is commonly treated under the following assumptions [1]. The light fields are described by Maxwell's equation

and the vibrational transitions are represented by two-level systems. Changes in the population of the two molecular levels are neglected (weak Raman interaction). The expectation value of the vibrational amplitude, the coherent amplitude  $\langle q \rangle$ , is the relevant quantity for the description of time-resolved coherent Raman spectroscopy. First, we discuss the coherent experiment for a single homogeneously broadened transition with dephasing time  $T_2$ . We use the ansatz of plane waves for the coherent amplitude  $\langle q \rangle = (i/2) Q \exp(-i\omega_q t + ik_q x) + \text{c.c.}$  and assume an isotropic Raman tensor for the investigated vibration. The coherent amplitude of a Raman active mode at frequency  $\omega_q$  is excited *via* transient stimulated Raman scattering by a pair of light pulses, the laser pulse  $E_L$  and the Stokes pulse  $E_S$  [1, 14]. The electric fields are considered to be plane waves, e.g.

$$E_L = 1/2 E_L \exp(-i\omega_L t + ik_L x) + \text{c.c.}$$

with the wave vector  $k_L$  and frequency  $\omega_L$  for the laser field. The driving force  $F(x, t)$  for the coherent amplitude  $Q$  is proportional to the product of the laser and the Stokes field,  $F(x, t) \propto E_L E_S^*$ ; as a result the frequency of the excitation force is  $\omega_L - \omega_S$ . The linear response theory applied to the excitation process leads to the following equation for the coherent amplitude  $Q$ :

$$Q(t) = \kappa \int_{-\infty}^t dt' E_L(t') E_S^*(t') \times \exp[(t' - t)/T_2 - i\Delta\omega t']. \quad (1)$$

The constant  $\kappa$  contains material parameters such as Raman cross-section and vibrational frequency  $\omega_q$  (see Ref. [1]).  $T_2$  stands for the dephasing time of the transition. Detuning between the excitation frequency and the vibrational mode is given by  $\Delta\omega = \omega_L - \omega_S - \omega_q$ . Under the action of a short exciting force the coherent amplitude  $\langle q \rangle$  evolves as follows:  $\langle q \rangle$  rises to a maximum with the exciting force and, subsequently, decays exponentially with the dephasing time  $T_2$ . During the free exponential decay the molecules oscillate at the resonance frequency  $\omega_q$ . In the experiment described here the large bandwidth of the short driving force allows several vibrations to be excited simultaneously. Since the excitation *via* stimulated Raman interaction is weak, the various modes evolve in time independent of each other. The different vibrations may be treated with the same ansatz introducing the individual resonance frequencies  $\omega_{qj}$ , phase factors  $\phi_j$ , amplitudes  $Q_j$ , and dephasing times  $T_{2j}$ .

In the time-resolved coherent Raman experiments, the amplitude  $\langle q \rangle$  generated at time zero is monitored by coherent Raman scattering of a delayed probing pulse  $E_{L2}$ . We investigate light on

the anti-Stokes side of the Raman spectrum generated by the nonlinear polarization  $P_{AS}^{NL}$ :

$$P_{AS}^{NL} = \lambda \langle q \rangle E_{L2} + \chi_{NR}^{(3)} E_L E_S^* E_{L2}. \quad (2)$$

The coherent signal consists of two contributions. The first part on the r.h.s. of equation (2) describes the coherent Raman signal of interest scattered from the excited vibrational mode. The constant  $\lambda$  contains the Raman cross-section of the mode. This part of the coherent signal is emitted at the resonant anti-Stokes frequency  $\omega_{AS} = \omega_{L2} + \omega_q$  and provides information on the dynamic properties of the investigated mode. The second part on the r.h.s. of equation (2) is related to the nonresonant nonlinear susceptibility  $\chi_{NL}^{(3)}$  resulting from electronic contributions [15]. The nonresonant part of the signal gives an instantaneous response, i.e. it follows the product  $E_L E_S^* E_{L2}$  and decays very rapidly with the time resolution of the experiment. The resonant part, on the other hand, shows the slow response of the resonantly excited vibrations. The nonresonant part of the coherent signal does not provide any information on the investigated modes. It has to be separated from the resonant signal. This fact is not possible in the steady-state coherent anti-Stokes Raman spectroscopy (CARS). In the time-resolved coherent anti-Stokes experiments described here the separation is possible due to the different time dependence of the two contributions: the rapidly decaying nonresonant part shows up around time zero, while at later delay times valuable information on the slower resonant part of the signal is collected.

In the present coherent experiment we measure the scattered Raman light as a function of the time delay  $t_D$  between excitation and probing pulses. In order to have optimum temporal resolution, pulses of very short duration for the exciting and probing laser fields are required.

Under these conditions the nonresonant signal is concentrated only around time zero and may be neglected at later times. Experimentally, one detects the time-integrated coherent signal  $S(t_D)$ :

$$\begin{aligned} S(t_D) &\propto \int_{-\infty}^{+\infty} dt |E_{AS}(t, t_D)|^2 \\ &\propto \int_{-\infty}^{+\infty} dt |P_{AS}^{NL}(t, t_D)|^2 \\ &\approx \int_{-\infty}^{+\infty} dt |\lambda \langle q \rangle E_{L2}|^2. \end{aligned} \quad (3)$$

According to equation (3) one measures the time dependence of the coherent amplitude or — more exactly — one determines the absolute square of the coherent amplitude, which decays exponentially with  $T_2/2$ .

When several modes are excited simultaneously, the signal decay is more complex. It can be shown

that for very short driving and probing pulses the coherent signal is equivalent to the absolute square of the Fourier transform of the spontaneous Raman spectrum [6, 7]. Here we analyse the coherent Raman signal at late delay times, where the different vibrational modes oscillate at their resonance frequencies  $\omega_{qj}$  and the amplitudes decay exponentially with the individual dephasing times  $T_{2j}$ . The coherent anti-Stokes field is the sum of the light field generated by the individual molecular modes  $Q_j$ . For short light pulses of duration  $t_p \ll T_2$ ,  $t_p \ll 1/\Delta\omega_{ij}$  one obtains :

$$E_{AS}(t, t_D) = \sum_j E_{ASj}(t, t_D) \\ \propto \sum_j Q_j(t_D) \exp(-i\omega_j t_D). \quad (4)$$

According to equations (3) and (4) simultaneously excited modes lead to a beating of the coherent signal at the frequency differences  $\Delta\omega_{ij}$  between the various transition frequencies  $\Delta\omega_{ij} = \omega_i - \omega_j$ . These « quantum beats » of the coherent signal may give accurate information on the vibrational spectrum.

The effect of different parameters on the coherent signal is readily seen for the simple example of two vibrational modes. We assume that the two modes with a frequency difference  $\Delta\omega$  and dephasing times  $T_{21}$  and  $T_{22}$  are excited to the coherent amplitude  $Q_{j0}$ . For equal amplitudes  $Q_{10} = Q_{20}$  one obtains for the coherent signal

$$S(t_D) = \\ = \left| \sum_{j=1,2} Q_{j0} \exp(-t_D/T_{2j} - i\omega_j t_D) \right|^2 \\ = Q_{10}^2 [\exp(-2t_D/T_{21}) + \exp(-2t_D/T_{22}) + \\ + 2 \cos(\Delta\omega t_D) \exp(-t_D(T_{22} + T_{21})/T_{21} T_{22})] \quad (5)$$

The signal consists of the two contributions of the individual transitions decaying with the respective dephasing times (first two expressions on the r.h.s. of Eq. (5)). The interference between the two molecular modes gives rise to the third term of equation (5), which causes strong modulation of the signal. When the two dephasing times strongly differ, the modulation depth of the signal decreases with increasing time. At late delay times the modulation dies out and a single unmodulated exponential decay appears. As an example, the signal curve for two vibrational modes at  $\Delta\omega = 10^{13} \text{ s}^{-1}$  ( $= 53 \text{ cm}^{-1}$ ),  $T_{21} = 6 \text{ ps}$  and  $T_{22} = 2 \text{ ps}$ , and  $Q_1(0)/Q_2(0) = 0.9$  is depicted in figure 1. At early times, when the two coherent amplitudes  $Q_1(t)$  and  $Q_2(t)$  are not yet affected by the exponential decay, the signal is strongly modulated by the frequency difference  $\Delta\omega$ . At later times the more rapidly

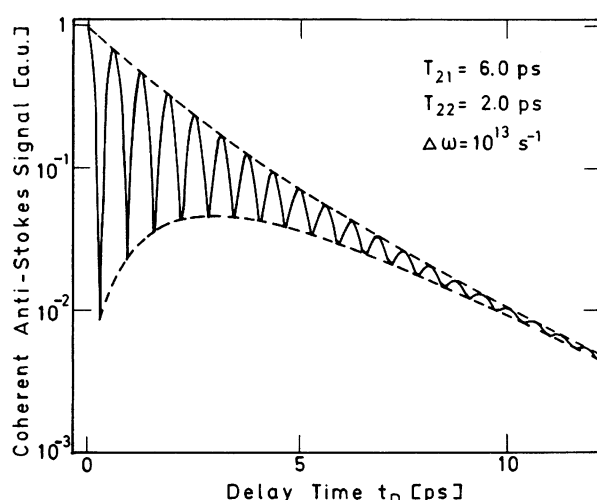


Fig. 1. — Coherent Raman signal calculated for two simultaneously excited molecular modes with the frequency difference  $\Delta\omega = 10^{13} \text{ s}^{-1}$  ( $\Delta 53 \text{ cm}^{-1}$ ). The initial amplitudes have a ratio of  $Q_{10}/Q_{20} = 0.9$  and dephasing times  $T_{21} = 6 \text{ ps}$  and  $T_{22} = 2 \text{ ps}$ . The modulation of the signal decreases with the shorter one of the two dephasing times.

decaying coherent amplitude, and with it the modulation, vanishes. Data similar to figure 1 allow the determination of the two dephasing times and the frequency difference  $\Delta\omega$ .

For more complicated situations equations (3) and (4) permit the numerical analysis of the experimental data. With a least square-fit procedure one may deduce the molecular parameters such as dephasing times and frequency differences, by minimizing the difference between the experimental data and the theoretical curves. As shown below, the molecular quantities may be determined with high precision.

An alternative possibility to obtain the frequency-domain information from the time domain data is the straight forward application of a Fourier transformation [7]. As discussed in the literature it is advantageous to multiply the experimental data by a correction function, which compensates the exponential decay of the signal within the boundaries of the experimental time range. In this way the calculated line shape is not Lorentzian, and the accuracy of the line positions is improved.

### 3. Experimental.

The experimental system is depicted schematically in figure 2. Pulses from a mode-locked argon-ion laser synchronously pump two dye lasers. The specially designed femtosecond unidirectional ring (UDR) dye laser [16, 17] contains an amplifying jet (dye Rhodamine 6G) and an absorber jet (dye DODCI). The laser emits pulses with a duration of 80 fs at  $\lambda = 625 \text{ nm}$  with an average power of 30 mW. The pulses from this laser provide us with the exciting

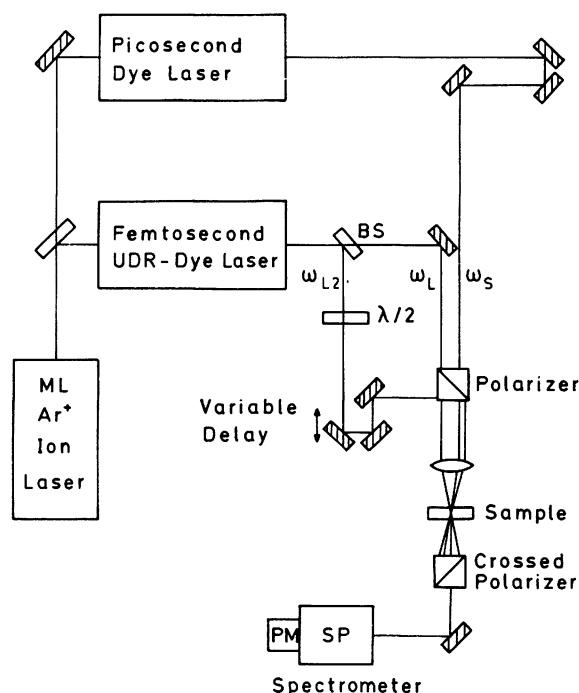


Fig. 2. — Experimental set-up used for Fourier transform coherent Raman spectroscopy. A mode-locked argon-ion laser synchronously pumps a femtosecond unidirectional ring dye laser (frequency  $\omega_L$ ) and a tunable picosecond dye laser (frequency  $\omega_S$ ). Excitation is done with a synchronized pair of pulses at  $\omega_L$  and  $\omega_S$ , while the probing pulses at  $\omega_{L2}$  are produced by a beam splitter BS from the femtosecond laser pulses  $\omega_L$ . The coherent anti-Stokes light generated *via* the probing pulse is recorded as a function of the time delay adjusted by the variable delay line.

pulses  $E_L$  and, *via* the beam splitter BS, with the probing pulses  $E_{L2}$ . The second laser is a standard synchronously mode-locked picosecond dye laser with amplifying dyes DCM or Pyridine 2 and a three-plate birefringent filter as a tuning element (power 30 mW). When tuned through the red and the infrared part of the spectrum, pulses  $E_S$  at the Stokes frequency  $\omega_S$  of 6 ps duration are generated. The femtosecond pulses from the UDR laser and the picosecond pulses of the second laser, both with parallel polarization, serve to excite molecular vibrations with a tuning range between  $300\text{ cm}^{-1}$  and  $3\,000\text{ cm}^{-1}$ . It can be derived from equation (1) that the driving force exists only for the time duration of the shorter of the two pulses, i.e. for a time of 80 fs. A major advantage of the system is the wide tunability of the excitation frequency  $\omega_L - \omega_S$  with the help of the birefringent filter of the picosecond laser while keeping the favorable femtosecond time resolution. The coherent vibrational excitation is monitored by probing pulses derived from the femtosecond laser. These pulses are polarized perpendicular to the excitation pulses. The three beams are focused into the sample using a geometry appro-

priate for anti-Stokes phase matching. The anti-Stokes radiation  $E_{AS}$  generated by the probing process passes the second polarizer and is detected in conjunction with the broad-band spectrometer SP by the cooled photomultiplier PM. The coherent signal is recorded as a function of the delay time (set by the variable delay line) between the exciting and probing pulses.

#### 4. Fourier transform coherent Raman spectroscopy of transitions with terahertz frequency differences.

High-resolution Fourier transform coherent Raman spectroscopy was first reported by Graener and Laubereau [7], who worked with light pulses of 20 ps duration. The authors studied vibrational-rotational transitions in  $\text{CH}_4$  separated by less than  $1\text{ cm}^{-1}$  with high frequency resolution of  $10^{-3}\text{ cm}^{-1}$ . The data were taken over a time interval of 12 ns. In the experiment described here we extend Fourier transform coherent Raman spectroscopy for the first time to the study of large frequency differences up to  $350\text{ cm}^{-1}$ . To see the related beating phenomena one requires high time resolution. For example, a frequency difference of  $350\text{ cm}^{-1}$  produces a beating pattern with peaks separated by 95 fs. In order to resolve this very rapid phenomenon, one has to work with femtosecond light pulses. Synchronized light pulses of approximately 80 fs duration became available only recently [16, 17] permitting the experiments reported here.

The first investigation treats vibrations in neat pyridine and in pyridine/cyclohexane mixtures. We study Raman active vibrations of liquid pyridine at frequencies  $991\text{ cm}^{-1}$  and  $1\,030\text{ cm}^{-1}$  assigned to two  $A_1$  ring modes [18]. Both vibrations have similar spectral width ( $\sim 2.2\text{ cm}^{-1}$ ) and similar Raman cross-sections; they are separated by  $39\text{ cm}^{-1}$ . In the Raman excitation process a frequency difference of  $(\omega_L - \omega_S)/2\pi c = 1\,010\text{ cm}^{-1}$  between the laser and the Stokes frequency is applied. Due to the broad spectral width of the femtosecond exciting force of more than  $200\text{ cm}^{-1}$  both pyridine modes are simultaneously excited in the experiment. Figure 3a shows the observed anti-Stokes signal plotted as a function of the time delay between exciting and probing pulses. During the excitation process at time zero the coherent signal rises to a pronounced peak. It subsequently decays quickly over more than one order of magnitude. Later on the signal recovers and shows strong oscillations. The modulation depths exceeds a factor of ten. Two features of the coherent signal are of special interest here: (i) the period of oscillation is approximately 0.85 ps. Consequently, the frequency difference between the two modes is 1.18 THz. (ii) The peaks of the oscillation decay exponentially with the decay time  $T_2/2 = 2.55 \pm 0.15\text{ ps}$ . The depth of the oscilla-

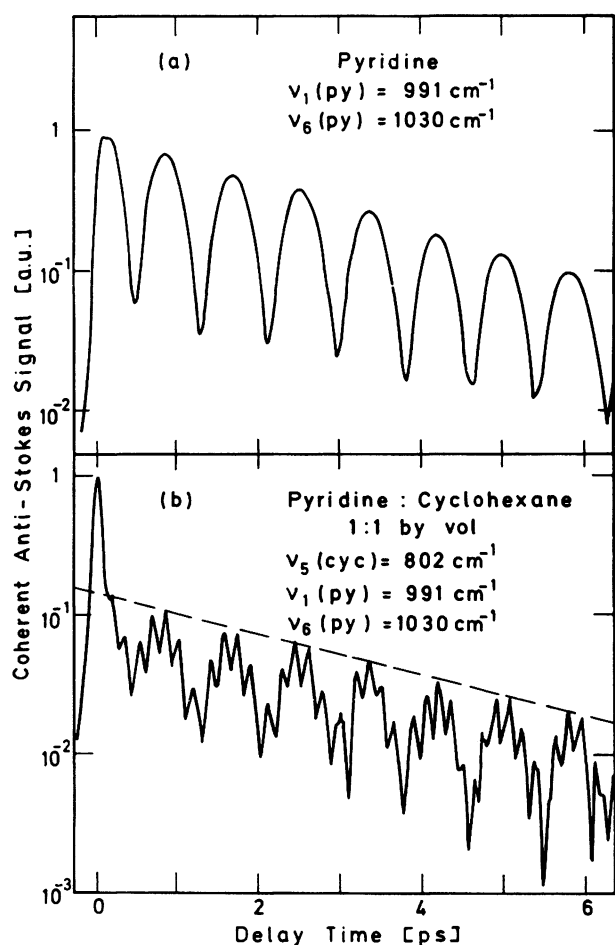


Fig. 3. — Time resolved coherent Raman scattering using femtosecond time resolution. (a) Beat pattern of pure pyridine after excitation of the two pyridine modes at  $991\text{ cm}^{-1}$  and  $1030\text{ cm}^{-1}$ . (b) Beat pattern of a mixture of pyridine and cyclohexane. Three molecular modes are excited.

tion slightly decreases for long observation times indicating a difference between the dephasing times of the two modes of 10 %.

In figure 3b we present an amazingly complicated, but perfectly reproducible anti-Stokes pattern. A mixture of cyclohexane and pyridine (1 : 1 by volume) was investigated with femtosecond light pulses. In this case three vibrational modes with similar  $T_2$  values beat together. They are : one cyclohexane mode at  $802\text{ cm}^{-1}$  [19] and two pyridine modes at  $991\text{ cm}^{-1}$  and  $1030\text{ cm}^{-1}$ . We find a rich beating structure originating from the interference of the three modes. The frequency differences of the excited modes are determined by the following procedure. The exponential decay is removed by multiplying the signal with an exponential rising function. An appropriate window function is introduced to remove the influence of the boundaries of the time range. After these arithmetical manipulations a Fourier transformation of the time-dependent data gives the results shown in figure 4. Three

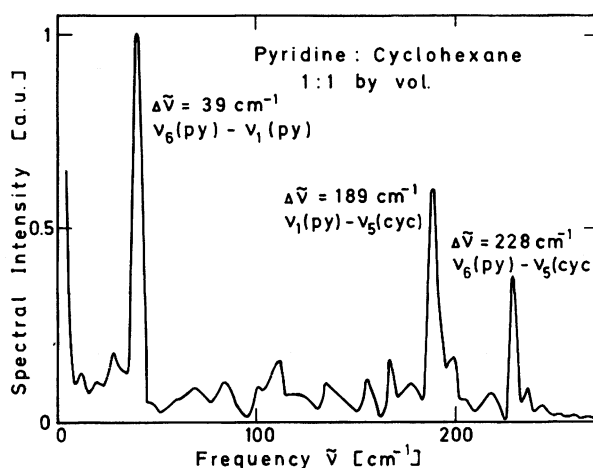


Fig. 4. — Difference spectrum of pyridine and cyclohexane obtained by numerical Fourier transformation of the time resolved data from figure 3b. Note the strong peaks at  $39\text{ cm}^{-1}$ ,  $189\text{ cm}^{-1}$ , and  $228\text{ cm}^{-1}$ , which correspond to the differences between the three excited modes. The highest difference frequency is  $\Delta\nu = 6.84\text{ THz}$ .

sharp and pronounced peaks are found at  $39\text{ cm}^{-1}$ ,  $189\text{ cm}^{-1}$  and  $228\text{ cm}^{-1}$ , which correspond to the frequency differences between the three modes excited in the mixture. The frequency width of the three different lines is approximately  $5\text{ cm}^{-1}$ ; this width is due to the limited time range of observation (e.g. 6 ps in Fig. 3). The background noise in figure 4 reflects the experimental noise of figure 3 and the applied window function.

A very promising method to evaluate the experimental data is the modelling of the beat pattern according to equations (3) and (4). An example is given in figure 5a, where we consider two modes to simulate an extended beating pattern of neat pyridine (redrawn in Fig. 5b for ready comparison). Two theoretical curves are calculated for the same set of experimental parameters. Only the difference frequency  $\Delta\omega$  was changed by the small amount of  $0.4\text{ cm}^{-1}$  (i.e. 1 %) from  $39.2\text{ cm}^{-1}$  (broken curve) to  $39.6\text{ cm}^{-1}$  (solid curve). Superposition of the experimental and calculated curves gives an impressive fit over the entire time range. It is possible to deduce a very precise frequency difference of  $39.4 \pm 0.2\text{ cm}^{-1}$ .

Interesting results were obtained in the coherent Raman study of liquid nitrobenzene, where we observe the highest beat frequencies. With an excitation frequency at  $1200\text{ cm}^{-1}$  we detect a rich beating structure. In figure 6b the coherent signal curve is plotted on a linear scale for a time interval from 0.2 ps to 2.5 ps. An extremely rapid modulation is found with the shortest time between subsequent peaks of less than 100 fs. A Fourier transform to the frequency domain reveals four strong peaks at  $16\text{ cm}^{-1}$ ,  $104\text{ cm}^{-1}$ ,  $237\text{ cm}^{-1}$ , and  $341\text{ cm}^{-1}$ , and a

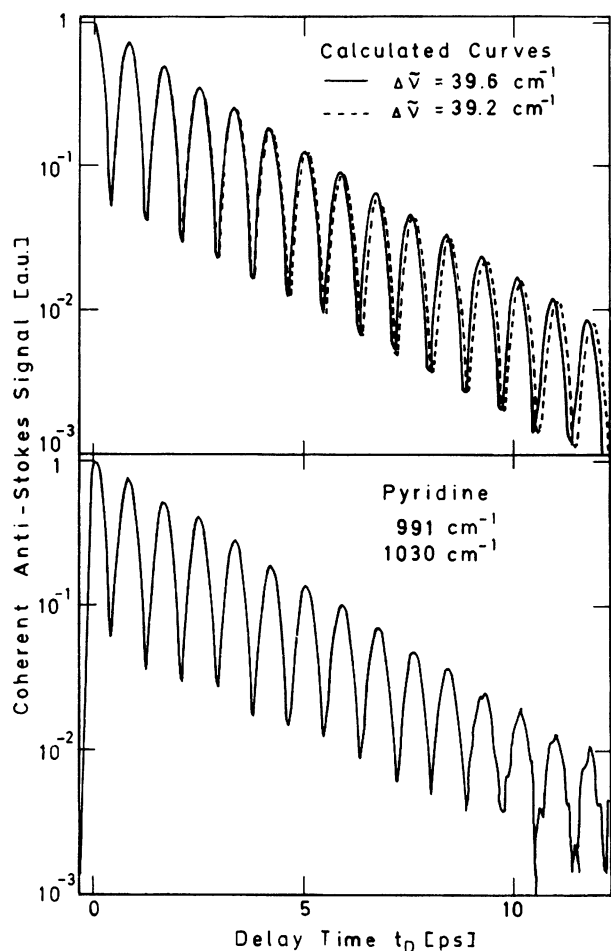


Fig. 5. — Time resolved coherent Raman data for liquid pyridine. (a) Two curves calculated according to equations (3) and (4) using the dephasing times  $T_{21}$  ( $991 \text{ cm}^{-1}$ ) = 5.1 ps and  $T_{22}$  ( $1030 \text{ cm}^{-1}$ ) = 4.7 ps and the frequency differences of  $39.6 \text{ cm}^{-1}$  and  $39.2 \text{ cm}^{-1}$ . Comparison of the calculated curves with the experimental data of figure 5b gives a very accurate number for the frequency difference between the two modes of  $\Delta\nu = 39.4 \pm 0.2 \text{ cm}^{-1}$ .

number of weaker peaks. The value of  $341 \text{ cm}^{-1}$  or 10.5 THz corresponds to the beating of the two nitrobenzene modes at  $1000 \text{ cm}^{-1}$  and  $1341 \text{ cm}^{-1}$ . Both modes were excited simultaneously in the transient stimulated Raman process. In figure 6a we show a beat curve calculated for the following set of data :

$$\begin{array}{ll} \nu/c = 1000 \text{ cm}^{-1}, & T_2 = 2.9 \text{ ps} \\ 1016.4 \text{ cm}^{-1}, & T_2 = 2.7 \text{ ps} \\ 1104.2 \text{ cm}^{-1}, & T_2 = 1.1 \text{ ps} \\ 1340.9 \text{ cm}^{-1}, & T_2 = 2.1 \text{ ps} \end{array}$$

Using a least square-fit procedure to adjust the theoretical parameters a very good agreement of the theoretical and experimental curves is achieved. The data analysing procedure indicates that the frequency

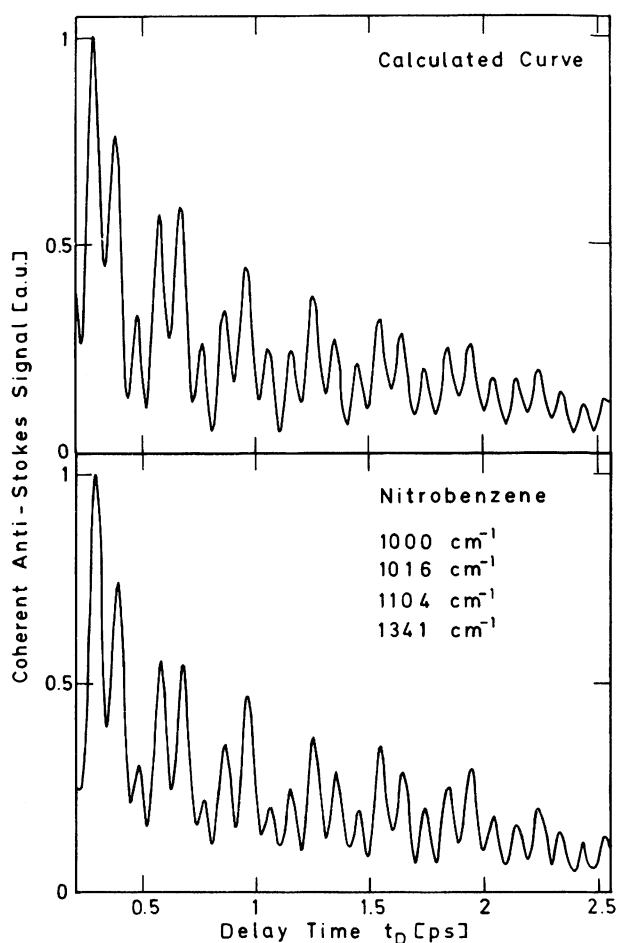


Fig. 6. — Time resolved coherent Raman data for liquid nitrobenzene. (a) The curve (calculated by a least square-fit procedure) should be compared with the results shown below). The four vibrational components with difference frequencies  $\Delta\nu/c$  up to  $340.8 \text{ cm}^{-1}$  are listed in figure 6b. (b) Experimental curve of liquid nitrobenzene showing high-frequency beat phenomena extending to frequencies of 10.5 THz.

differences  $\Delta\Omega$  may be determined with a precision approaching  $10^{-3}$ .

## 5. Summary.

In this paper we have extended Fourier transform coherent Raman spectroscopy to the frequency range of 10 THz. With this technique we are now able to resolve terahertz phenomena with high accuracy.

Two points are relevant : (i) the frequency resolution is determined by the total time interval of the experiment. In order to improve spectral resolution the coherent signal has to be measured over delay times as long as possible. Taking into account the exponential decay of the signal with  $T_2/2$  one immediately finds that the spectral resolution is directly related to the signal-to-noise ratio of the experiment. (ii) The duration of the exciting and



probing pulses does not influence the frequency resolution of the experiment, but determines the highest detectable beat frequencies to approximately

$\Delta\nu_{\max} \approx 1/t_p$ . Under the present experimental conditions beat frequencies exceeding 10 THz are readily detected.

### References

- [1] LAUBEREAU, A., KAISER, W., *Rev. Mod. Phys.* **50** (1978) 607 ;  
PENZKOFER, A., LAUBEREAU, A., KAISER, W., *Progr. Quantum. Electron.* **6** (1979) 55.
  - [2] VON DER LINDE, D., LAUBEREAU, A., KAISER, W., *Phys. Rev. Lett.* **26** (1971) 954.
  - [3] VELSKO, S., TROUT, J., HOCHSTRASSER, R. M., *J. Chem. Phys.* **79** (1983) 2114.
  - [4] GALE, G. M., GUYOT-SIONNEST, P., ZHENG, W. Q., *Opt. Commun.* **58** (1986) 395.
  - [5] D'YAKOV, Yu. S., KRIKUNOV, S. A., MAGNITSKIL, S. A., NIKITIN, S. Yu., TUNKIN, V. G., *Sov. Phys. JETP* **57** (1983) 1172.
  - [6] ZINTH, W., KAISER, W., *In Organic Molecular Aggregates*, Eds R. Reinecker, H. Haken, H. C. Wolf, Solid State Science, Vol. 49 (Springer, New York) 1983, p. 124.
  - [7] GRAENER, H., LAUBEREAU, A., *Opt. Commun.* **54** (1985) 141.
  - [8] ZINTH, W., *Opt. Commun.* **34** (1980) 479.
  - [9] ZINTH, W., NUSS, M. C., KAISER, W., *Chem. Phys. Lett.* **88** (1982) 257.
  - [10] COLLINS, M. A., MADDEN, P. A., BUCKINGHAM, A. D., *Chem. Phys.* **94** (1985) 291.
  - [11] ZINTH, W., NUSS, M. C., KAISER, W., *Phys. Rev. A* **30** (1984) 1139.
  - [12] LEONHARDT, R., HOLZAPFEL, W., ZINTH, W., KAISER, W., *Chem. Phys. Lett.* **133** (1987) 373.
  - [13] ZINTH, W., LEONHARDT, R., HOLZAPFEL, W., KAISER, W., submitted to *J. Quantum Electron.*
  - [14] CARMAN, R. L., SHIMIZU, I., WANG, C. S., BLOEMBERGEN, N., *Phys. Rev. A* **2** (1970) 60.
  - [15] ZINTH, W., LAUBEREAU, A., KAISER, W., *Opt. Commun.* **26** (1978) 457.
  - [16] NUSS, M. C., LEONHARDT, R., ZINTH, W., *Opt. Lett.* **10** (1985) 16.
  - [17] DOBLER, J., SCHULZ, H. H., ZINTH, W., *Opt. Commun.* **57** (1986) 407.
  - [18] LONG, D. A., MURFIN, F. S., THOMAS, E. L., *Trans. Farad. Soc.* **59** (1963) 12.
  - [19] WIBERG, K. B., SHRAKE, A., *Spectrochim. Acta* **27A** (1971) 1139.
-